



APPROACH SPECIFICATIONS

TYPICAL LAYOUT

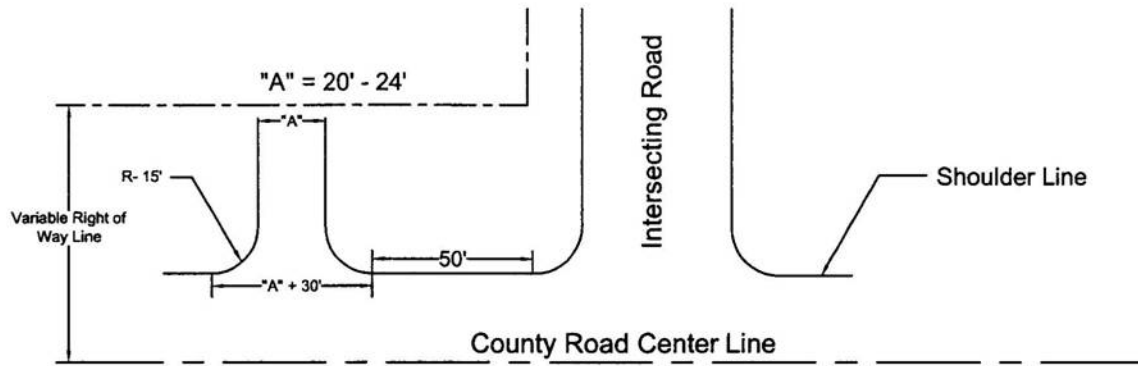

TYPICAL CROSS-SECTIONS

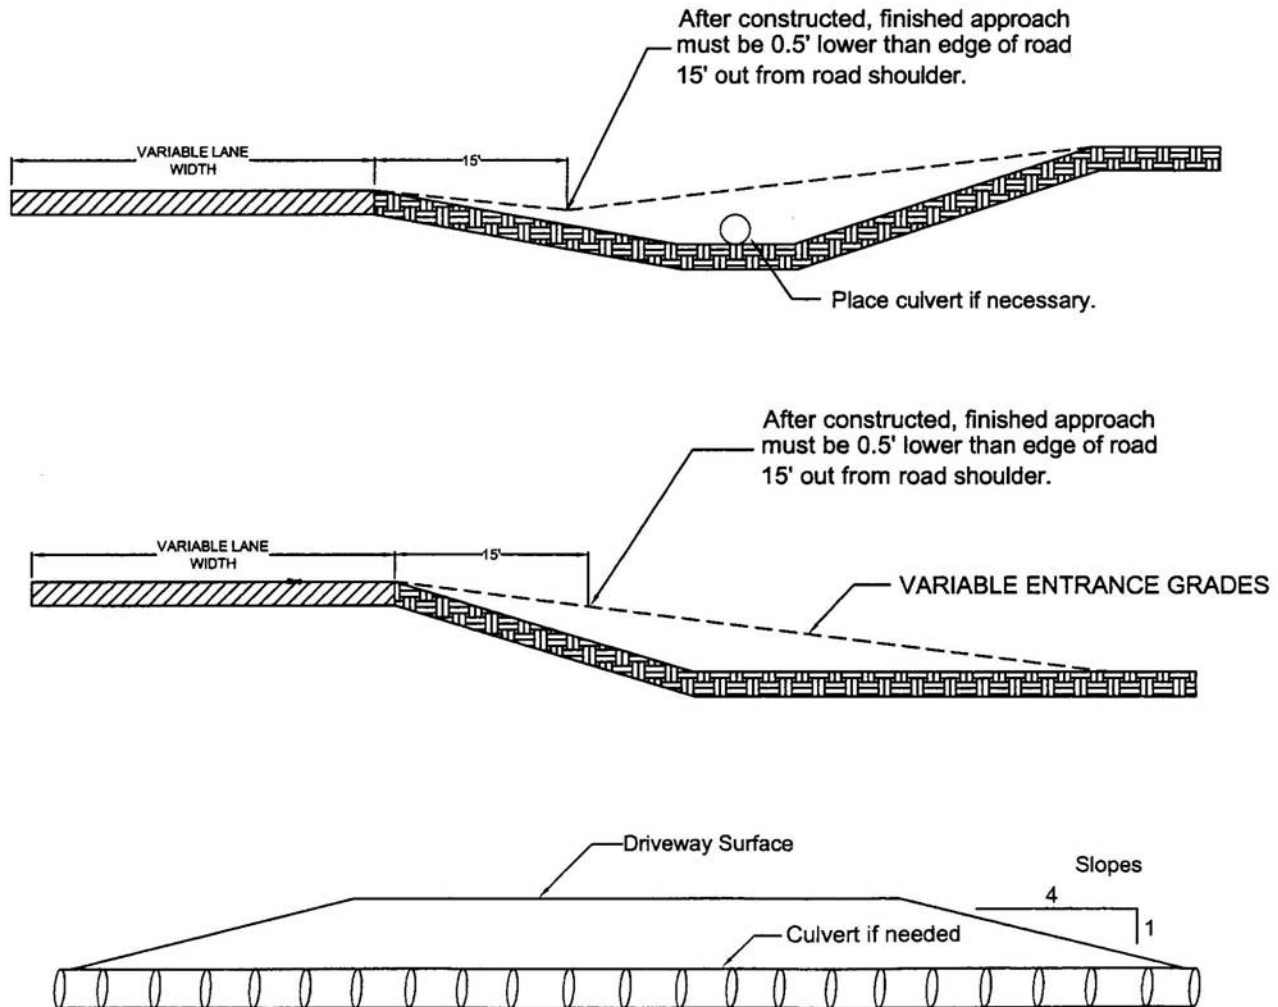

NOTE:

Corrugated metal pipes having circumferential joints shall be laid with the outside laps pointing upgrade and with the longitudinal joints on the sides.